

**LED**  
DIRECT

VAPOUR PROOF  
CARPARKS & FIRE STAIRS

**Guardian  
VP RANGE**

VAPOUR PROOF FITTINGS



# Guardian VP RANGE

## VAPOUR PROOF FITTINGS

The Guardian range of Vapour proof lights are IP65 weatherproof and anti-corrosive. They are highly configurable to maximise flexibility and power savings. Certified to Australian Standard AS2293 in both horizontal and vertical mounting modes. The Guardian Range offer significant energy savings in emergency mode.

Both the case and the diffuser are manufactured in high quality polycarbonate to provide extra strength and durability. Meanwell drivers, light output stabilisation technology and Seoul chips ensures longevity and little degradation in light output over time. The VP range is suitable for Car Parks, Fire stairs, Food processing areas, Workshops, Tunnels, Railway stations and many more similar environments.



### STANDARD FEATURES

- Lithium backup batteries
- Polycarbonate LED diffuser
- IP65
- Microwave sensor
- 5 year Warranty
- MeanWell drivers
- Seoul Chips
- Light output stabilisation
- Separate battery compartment - Low voltage

### OPTIONS

- Dimming options
- Microwave Sensor range
- Standby Mode timing
- Emergency back up >2hrs

### COMPLIANCE / APPROVALS

- AS2293
- EMC (CISPR15)
- CE ROHS
- SAA
- LightLab Lithium Endurance



[www.leddirectsolutions.com.au](http://www.leddirectsolutions.com.au) | 0438 78 78 78 | [sales@leddirectsolutions.com.au](mailto:sales@leddirectsolutions.com.au)


**Disclaimer:**

All LED Direct products must be installed by a qualified electrician in accordance with that countries current laws and health and safety legislation. It is the responsibility of the contractor, installer, owner, purchaser, and user to ensure the equipment is installed, maintained and operated in such a manner as to satisfy that countries current regulations and legislation.

# Guardian VP RANGE

## VAPOUR PROOF FITTINGS

Part No	Power consumption (Watts)	LED QTY	IP Rating	LED Lumen	Battery Duration	Temp Max/Min	Colour Temp	Lifetime L70b50	Size Length x width x height (mm)	Weight (Mass)
VP2-20DS	20W	40	65	2254lm	N/A	-30/50c	5500-6500k	50,000h	660 x 134 x 94	1.5kg
VP2-20BBD	20W	40	65	2254lm	2 Hrs	-30/50c	5500-6500k	50,000h	740 x 134 x 94	1.6kg
VP4-20DS	20W	60	65	2254lm	N/A	-30/50c	5500-6500k	50,000h	1270 x 134 x 94	2.5kg
VP4-40DS	40W	80	65	4494lm	N/A	-30/50c	5500-6500k	50,000h	1270 x 134x 94	2.5kg
VP4-40BBD	40W	80	65	4494lm	2 Hrs	-30/50c	5500-6500k	50,000h	1320 x 125x 94	2.9kg
VP5-60DS	60W	120	65	6528lm	N/A	-30/50c	5500-6500k	50,000h	1595 x 134x 94	3.0kg

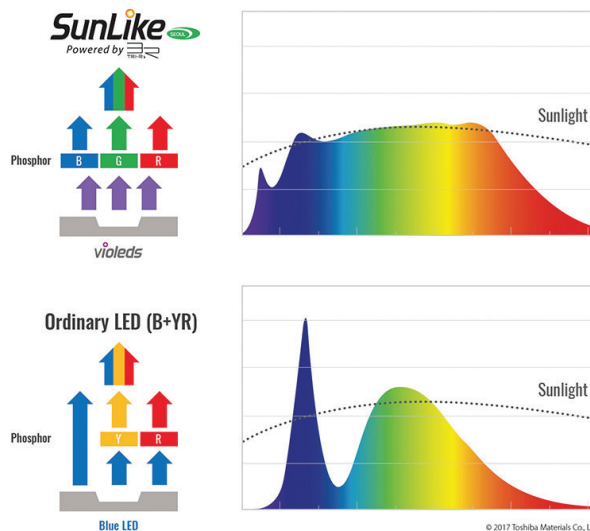

[www.leddirectsolutions.com.au](http://www.leddirectsolutions.com.au) | 0438 78 78 78 | [sales@leddirectsolutions.com.au](mailto:sales@leddirectsolutions.com.au)

**Disclaimer:**

All LED Direct products must be installed by a qualified electrician in accordance with that countries current laws and health and safety legislation. It is the responsibility of the contractor, installer, owner, purchaser, and user to ensure the equipment is installed, maintained and operated in such a manner as to satisfy that countries current regulations and legislation.